

Scope of Supply/Bill of Material & Mounting Drawings


Part Number: BMW-R1200GS-12-01-SL

Part Description: ABS SENSOR GUARD – BMW R1200 GS

Installation / Parts List / Bill of Material for Mounting

| NO. | Description | Quantity | Torque * (N-M) | Remarks ** |
|--------------------------------------------------------------------------------|------------------|----------|----------------|------------|
| 1 | Guard ABS Sensor | 1 | | |
| SRC Design uses Metric System of Measurement and all dimensions in Millimeters | | | | |
| * Recommended to use the Torque specified in the table | | | | |
| ** Denotes Usage of Liquid Thread Locker in specified Locations | | | | |

The scope of supply for the above, is the Metal Guard and we use the Original Bolt for mounting the same to the Motorbike.

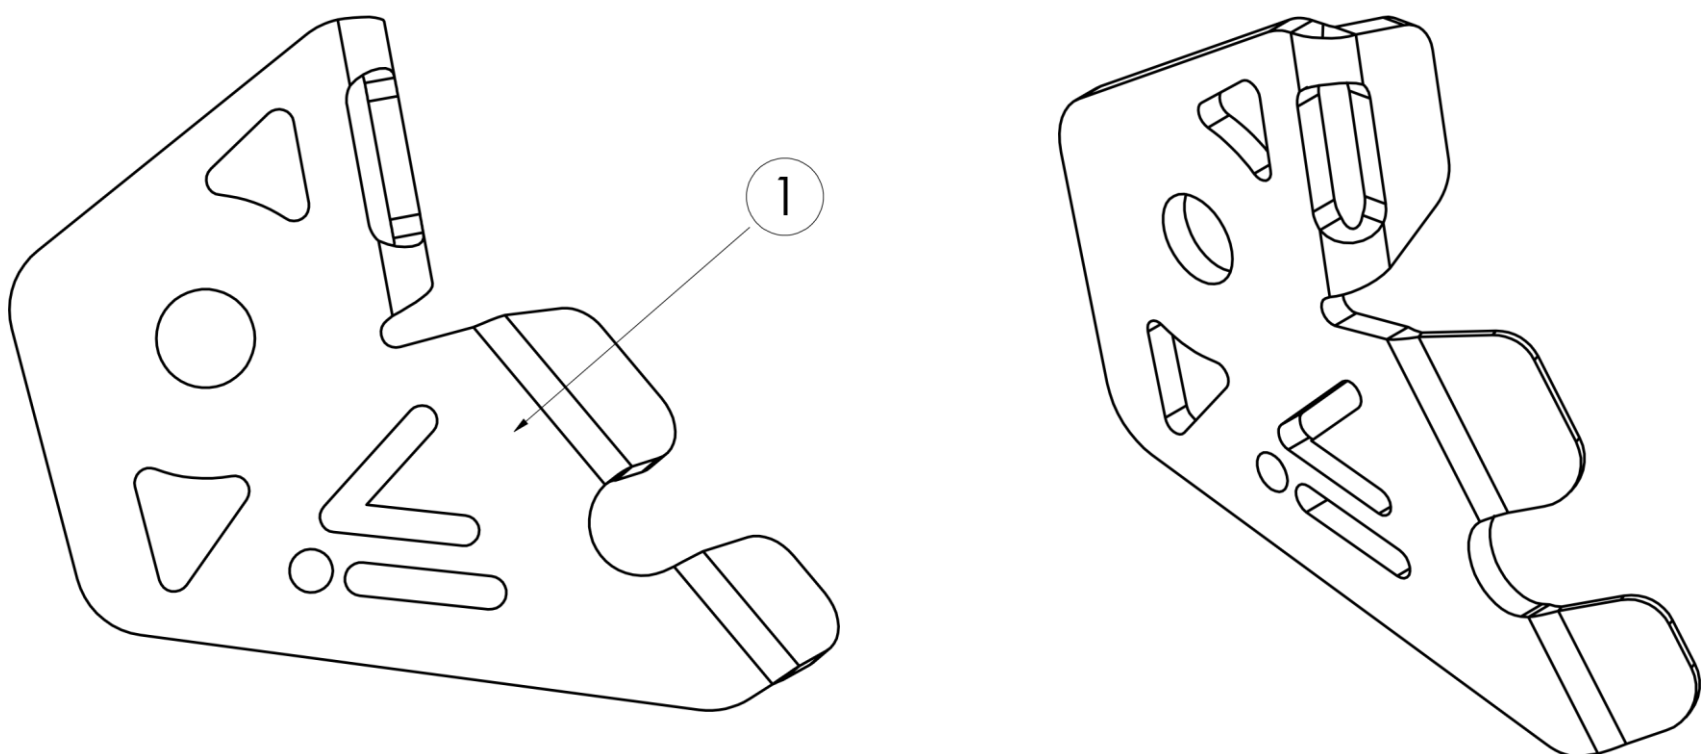


Mounting Instructions

Step 1:

Unscrew the OE Mounting Bolt, meant for fitment of the ABS sensor.


Orient the SRC ABS Metal Guard, as shown. This will shroud the ABS sensor, as shown.

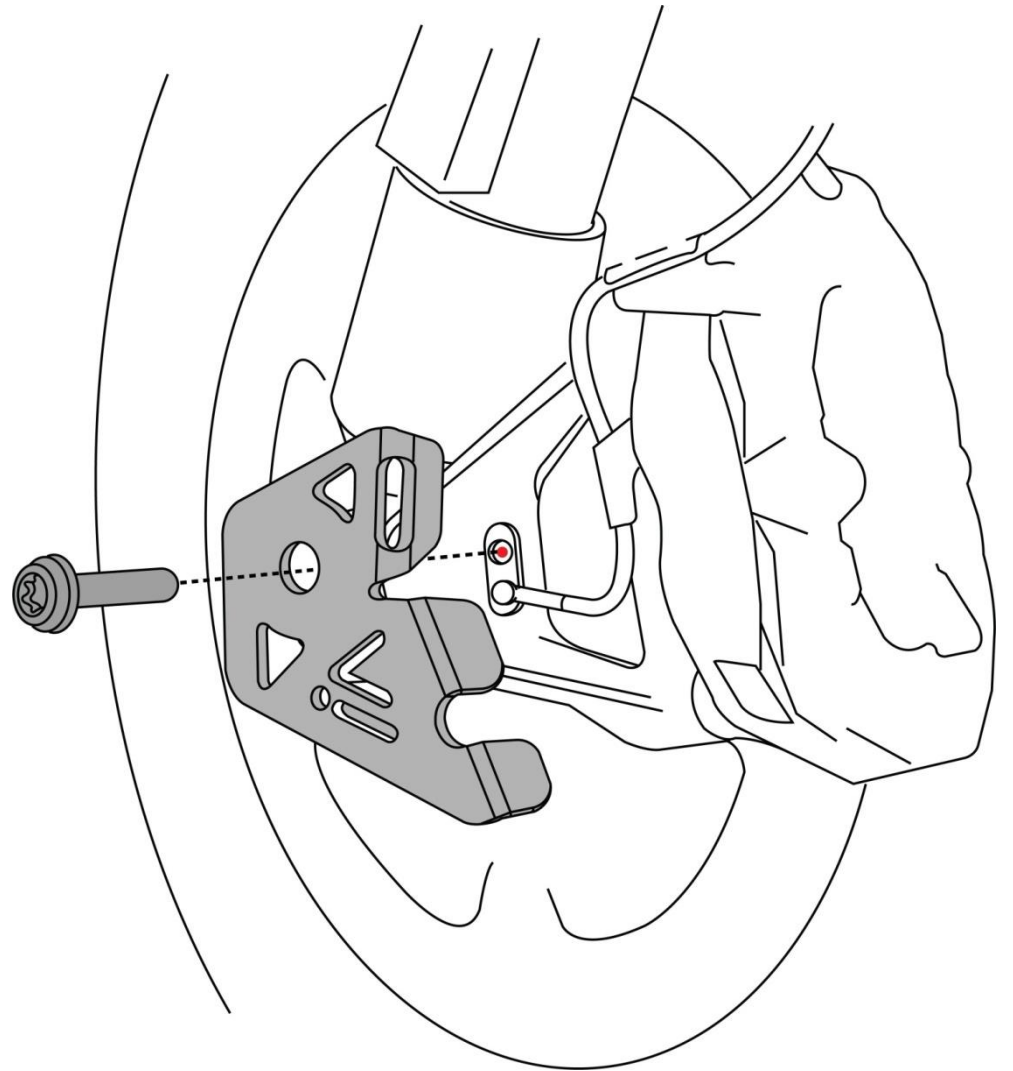

Step 2:

Tighten the Bolt (torque as per OE specification) and route the Sensor cable, through the cut-out in the Metal Guard, as shown.

The final fitted condition of ABS Sensor Guard, is as shown.

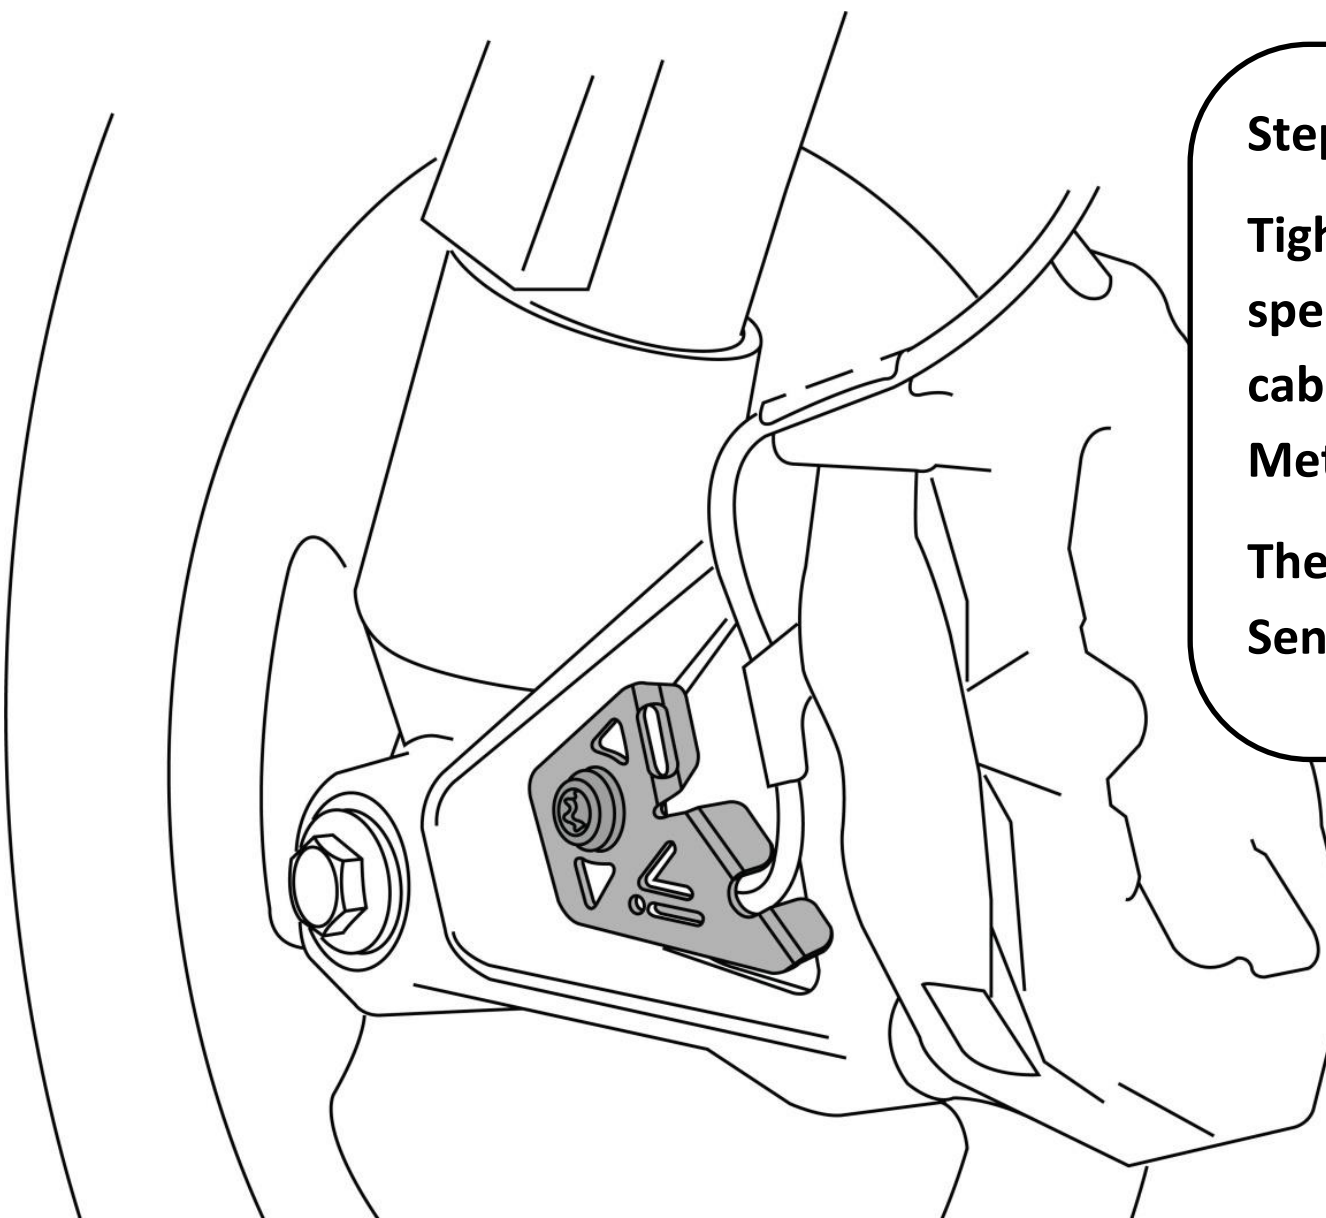

General Information

1. We request you to pay attention to the Mounting Instructions in this document and follow the step-by-step procedures.
2. This Mounting Instruction manual is a “Do It Yourself” (DIY) fitment manual of the Accessory part to the Vehicle. We have prepared this based on our experience and knowledge, related to the Vehicle, Part and its functional aspects.
3. SRC cannot guarantee the interchangeability of the parts to any other manufacturer’s accessory part. It is advised to the User, to inspect and ensure the original state of all other Vehicle parts.
4. We request you to bear in mind, that the Installed part can change the driving behaviour and/or the stability during driving or any other dynamic conditions.
5. If you have the appropriate tools and another person to assist you in the mounting, it will help.
6. To the maximum extent possible, our design use the current Mounting/Fitment of the Original Equipment, so that Installation of these accessories will not affect the Payload or Function of the Vehicle or the Part on which it is mounted to protect it
7. If any additional modifications are to be done, prior to the fitment of the accessories, it will be explicitly specified in the instruction sheets.