
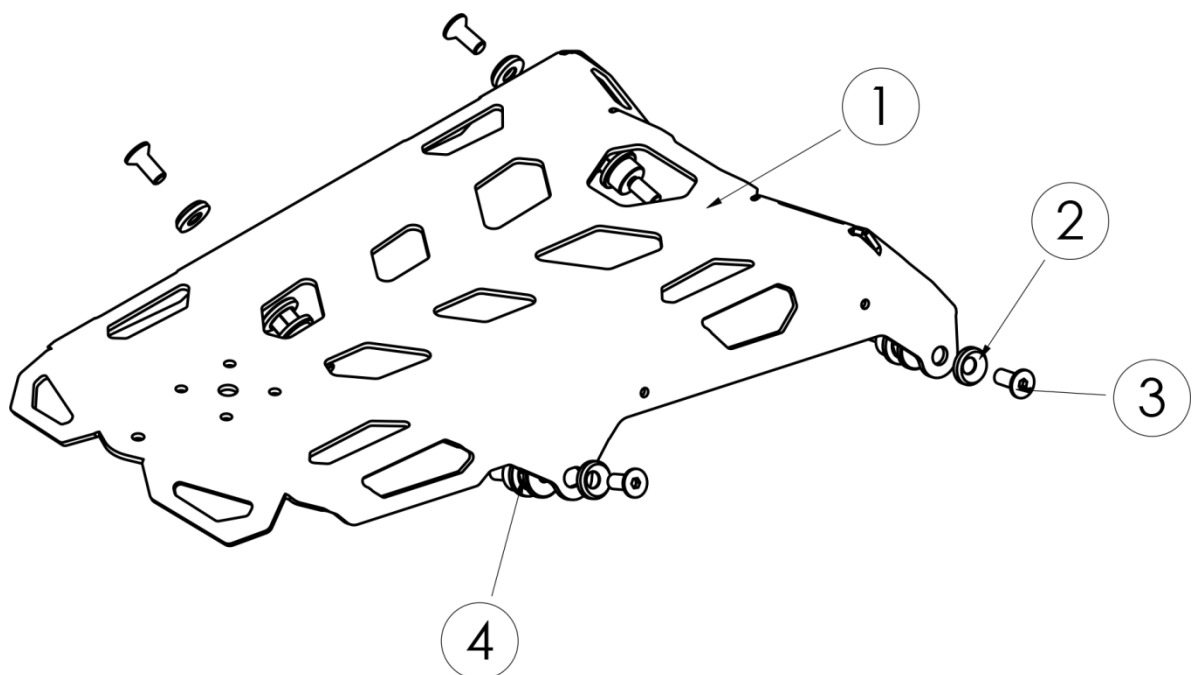
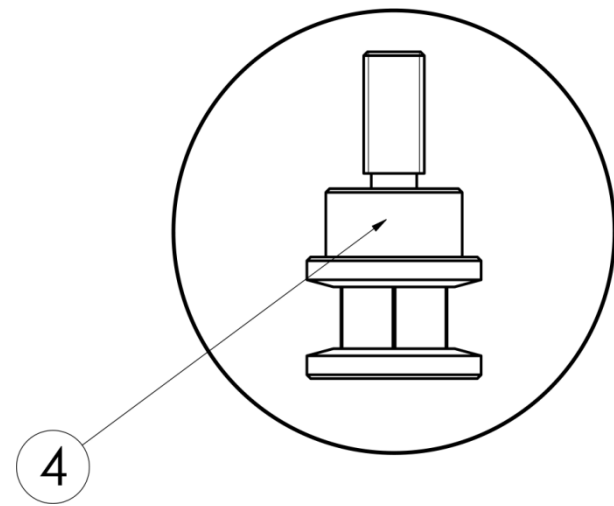


Scope of Supply/Bill of Material & Mounting Drawings





Part Number: Y-T700-04-01

Part Description: Top Rack– YAMAHA Tenere700


| NO. | Description | Quantity | Torque * (N-M) | Remarks ** | Chacklist |
|--|-----------------------------|----------|----------------|------------|-----------|
| 1 | TOP RACK | 1 | | | |
| 2 | TAPER RING M8 | 4 | | | |
| 3 | Socket head cap screw M8x20 | 4 | | | |
| 4 | PIN | 4 | | | |
| SRC Design uses Metric System of Measurement and all dimensions in Millimeters | | | | | |
| * Recommended to use the Torque specified in the table | | | | | |
| ** Denotes Usage of Liquid Thread Locker in specified Locations | | | | | |

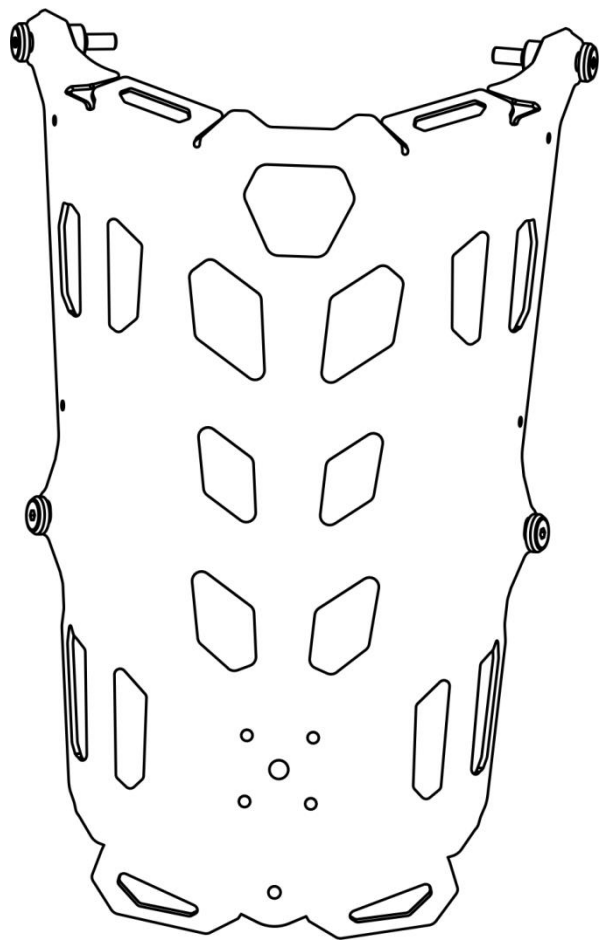

MOUNTING DRAWINGS

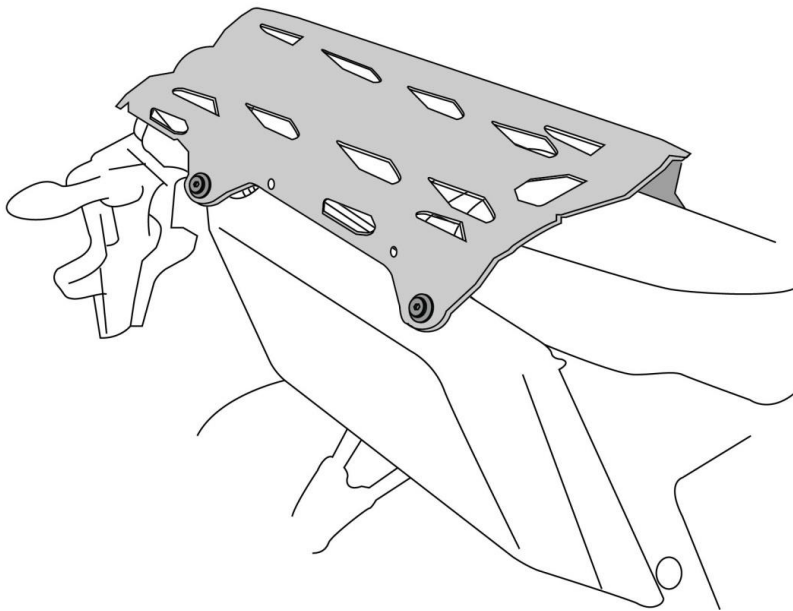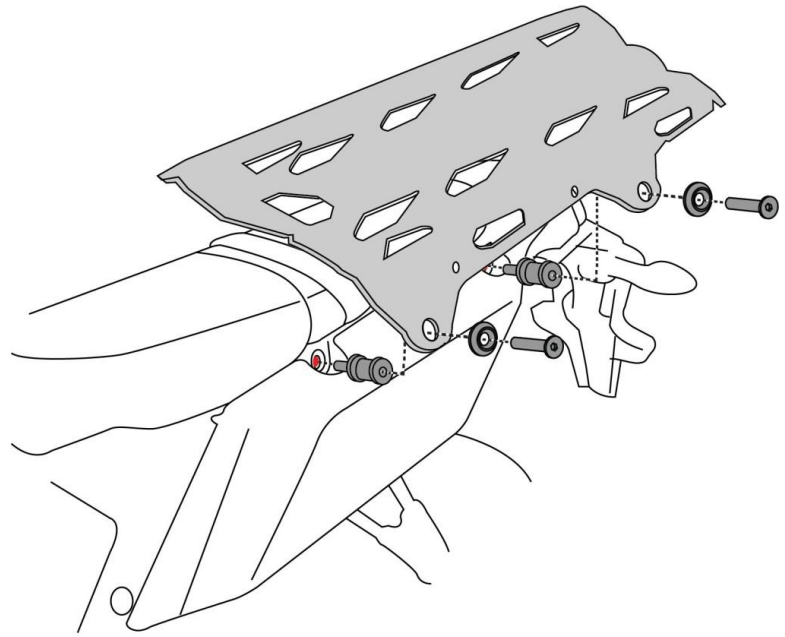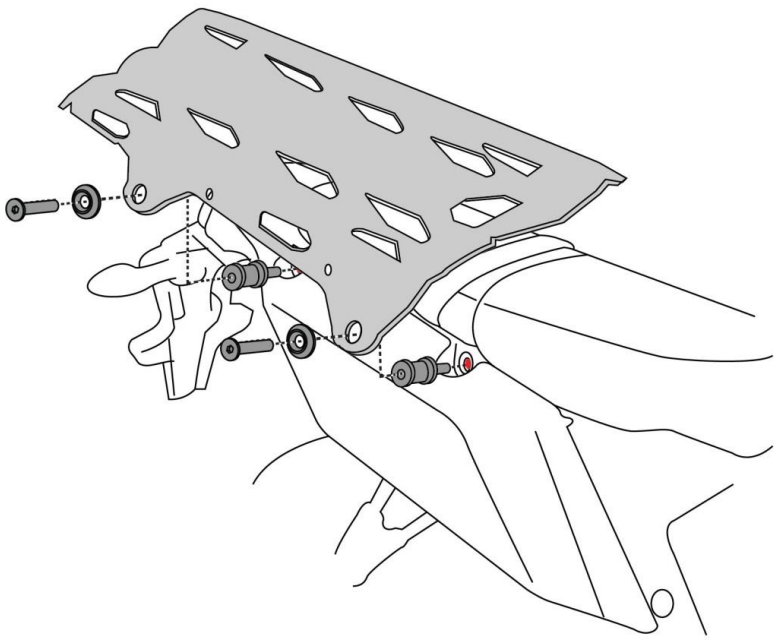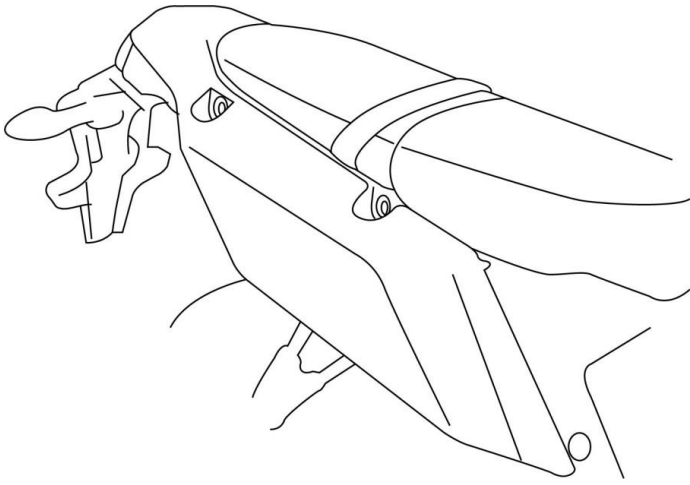



Mounting Instructions

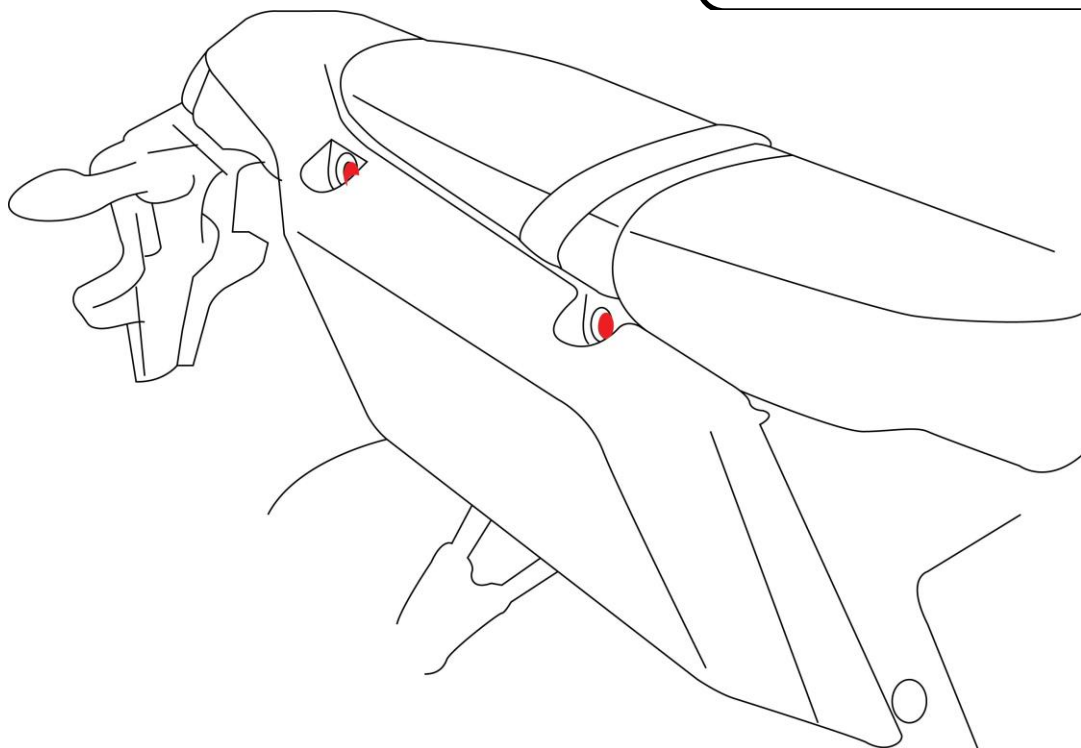

The two mounting holes, required for fitting the Top Case (1), are as shown in the drawing.

Step 1:

Orient and Align the Top Case (1), as shown, Slip-in the Pin (4) – 2 off, and Slip-in Screw M8 x 20 (3) – 2 off and Taper Ring M8 (2) – 2 off through the holes and secure the threads.

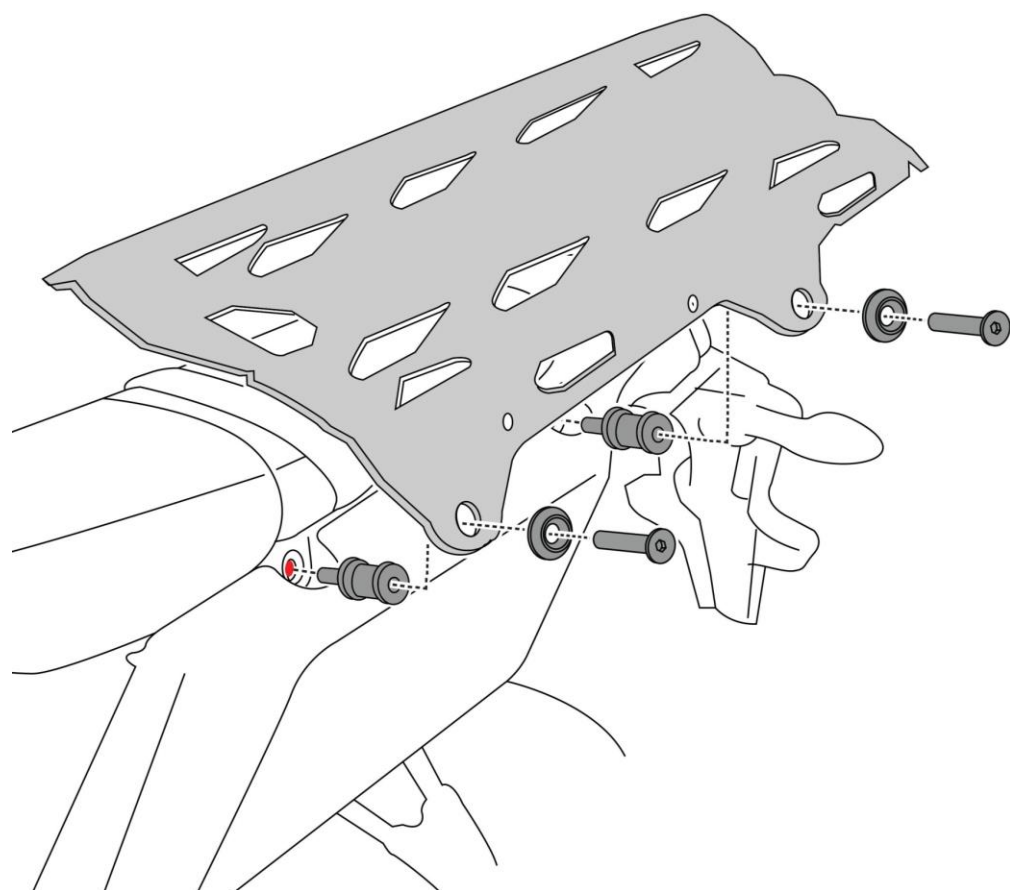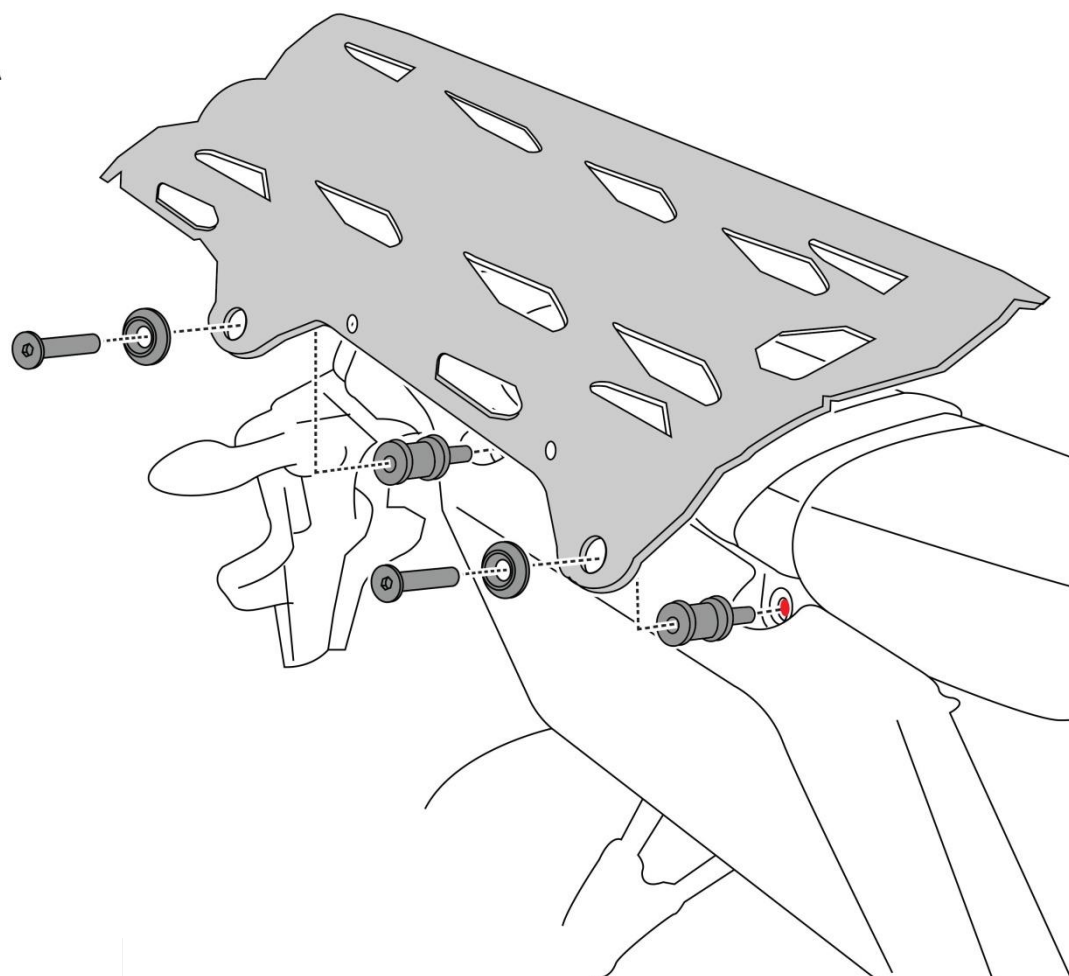


Repeat the above step for the other side to secure the threads.

Step 2:

Ensure the Orientation of all the Mounting Holes, and tighten them to torque, as specified in the BOM table.

The Top Case in “As is mounted condition” is as shown.

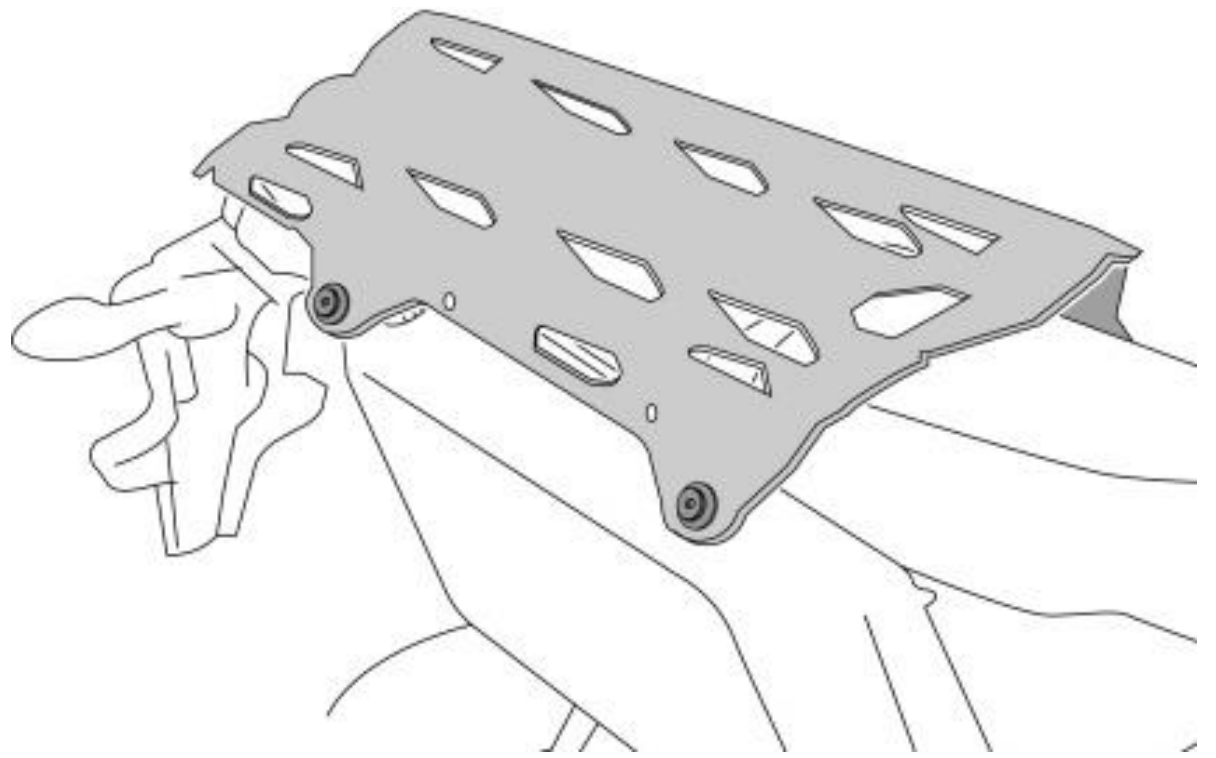



General Information

1. We request you to pay attention to the Mounting Instructions in this document and follow the step-by-step procedures.
2. This Mounting Instruction manual is a “Do It Yourself” (DIY) fitment manual of the Accessory part to the Vehicle. We have prepared this based on our experience and knowledge, related to the Vehicle, Part and its functional aspects.
3. SRC cannot guarantee the interchangeability of the parts to any other manufacturer’s accessory part. It is advised to the User, to inspect and ensure the original state of all other Vehicle parts.
4. We request you to bear in mind, that the Installed part can change the driving behaviour and/or the stability during driving or any other dynamic conditions.
5. If you have the appropriate tools and another person to assist you in the mounting, it will help.
6. To the maximum extent possible, our design use the current Mounting/Fitment of the Original Equipment, so that Installation of these accessories will not affect the Payload or Function of the Vehicle or the Part on which it is mounted to protect it
7. If any additional modifications are to be done, prior to the fitment of the accessories, it will be explicitly specified in the instruction sheets.